


MemPro Series Stainless Steel

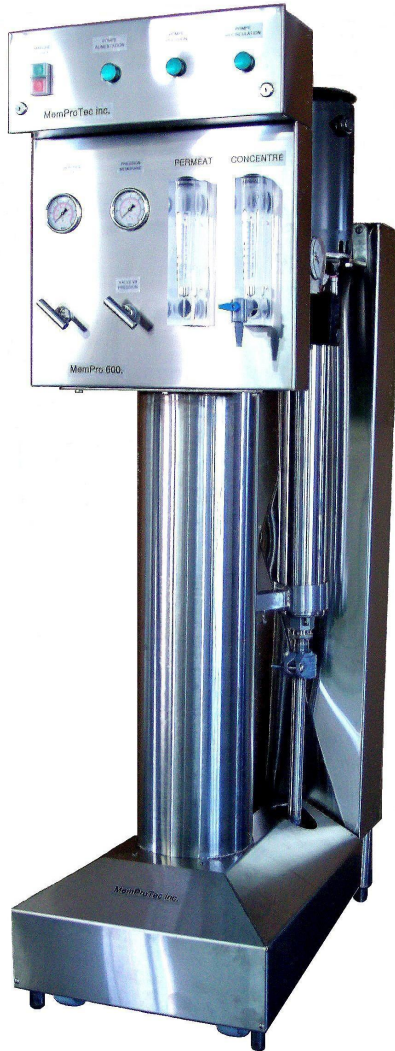

REVERSE OSMOSIS OR NANOFILTRATION SYSTEM

- 1 TO 3 MEMBRANES 8''x40''
- SS PASSIVATED HOUSINGS
- PRESSURE PUMP 3 TO 5 HP
- RECIRCULATION PUMP 1½ HP
- INTEGRATED CLEAN-IN-PLACE TANK (OPTION)
- PERMEATE FLOWMETER
- CONCENTRATE FLOWMETER
- INLET PRESSURE MANOMETER
- MEMBRANE PRESSURE MANOMETER
- TEMPERATURE INDICATOR
- CONDUCTIVITY METER (OPTION)
- INLET SOLENOID VALVE
- PRESSURE ADJUSTMENT VALVE
- CONCENTRATION ADJUSTMENT VALVE
- HIGH TEMPERATURE PROTECTION (OPTION)
- LOW PRESSURE PROTECTION
- FAST-FLUSH CYCLE (OPTION)
- PERMA-FLUSH CYCLE (OPTION)
- PLC CONTROL (OPTION)

MemPro Model	RO / NF membrane	Maximum capacity gpdUS (SDI<1)		Prefilter 5 microns	Pressure pump	Recirculation pump	Weight KG	Dimensions L x P x H
		(1°C)	(25°C)					
183-NFHP	1 x 8"	10 500	11 000	1 x 20"	3 hp	1,5 hp	255	19"x 30"x 64"
183-ROLP	1 x 8"	9 500	12 000	1 x 20"	3 hp	1,5 hp	255	19"x 30"x 64"
185-NFHP	1 x 8"	11 000	11 000	1 x 20"	5 hp	1,5 hp	275	19"x 30"x 64"
185-ROLP	1 x 8"	12 000	12 000	1 x 20"	5 hp	1,5 hp	275	19"x 30"x 64"
283-NFHP	2 x 8"	13 500	22 000	2 x 20"	3 hp	1,5 hp	400	19"x 42"x 64"
283-ROLP	2 x 8"	13 700	22 300	2 x 20"	3 hp	1,5 hp	400	19"x 42"x 64"
285-ROLP	2 x 8"	17 280	24 000	2 x 20"	5 hp	1,5 hp	450	19"x 42"x 64"
383-ROLP	3 x 8"	16 600	26 600	3 x 20"	3 hp	1,5 hp	575	36"x 42"x 64"
383-NFHP	3 x 8"	20 500	33 000	3 x 20"	3 hp	1,5 hp	575	36"x 42"x 64"
385-ROLP	3 x 8"	21 600	34 500	3 x 20"	5 hp	1,5 hp	605	36"x 42"x 64"