


MEMPROTEC inc

Sigma Standard Series

- STAINLESS STEEL HIGH PRESSURE PUMP
- HIGH PRESSURE SS OR FRP MEMBRANE HOUSINGS
- SEDIMENT CARTRIDGE PREFILTER
- CLEAN IN PLACE CIP SYSTEM (OPTION)
- FLOW AND CONDUCTIVITY METERS
- EPOXY PAINTED STEEL FRAME
- NÉMA 4 ELECTRICAL PANEL (OPTION)
- PLC CONTROL
- SYSTEM STATUS DISPLAY SCREEN
- LOW PRESSURE PROTECTION
- HIGH TEMPERATURE PROTECTION
- PRETREATMENT INTERLOCKS

REVERSE OSMOSIS OR NANOFILTRATION SYSTEM

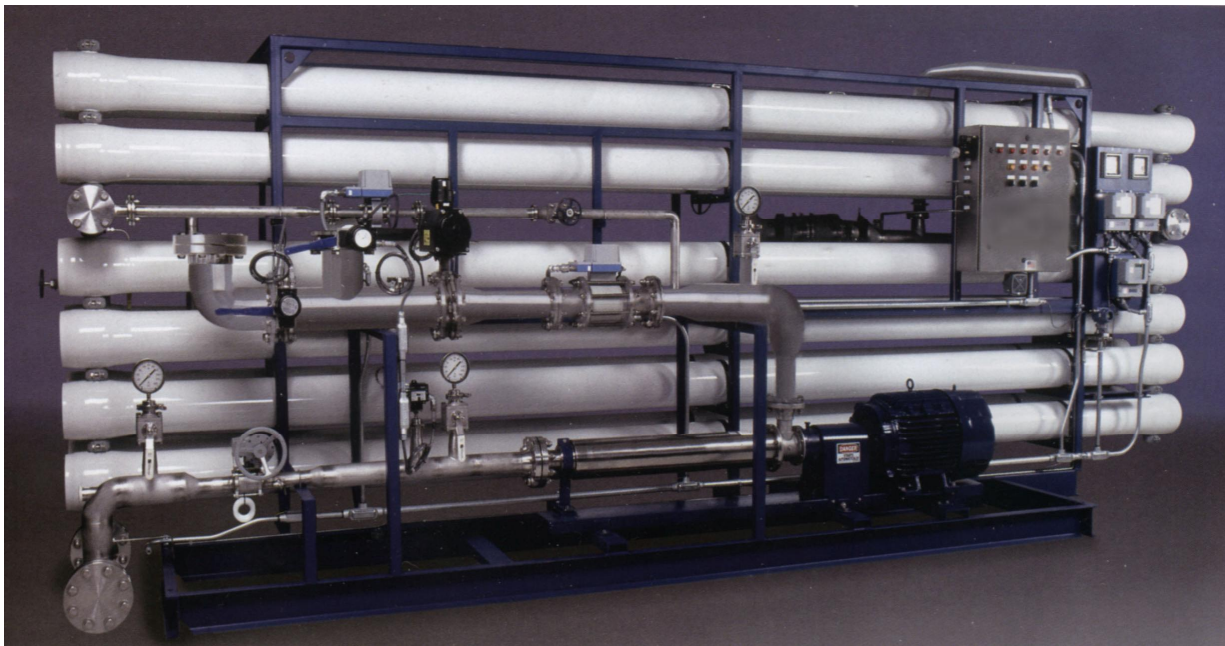

Sigma Model	Number of membranes (8" x 40")	Maximum capacity (SDI <1, 25°C)		Motor HP	Weight (lbs)	Length (in)	Width (in)	Height (in)
		GPMUS	GPDUS					
Sigma-12	12	40	57 600	15	2650	216	48	66
Sigma-16	16	60	86 400	20	3450	216	48	66
Sigma-24	24	80	115 200	20	4790	216	62	66
Sigma-30	30	110	158 400	25	6650	288	62	76
Sigma-36	36	130	187 200	25	7600	288	62	86
Sigma-48	48	175	252 000	40	9200	300	80	72
Sigma-60	60	225	324 000	50	11 000	300	80	78